

F5-1700 Hot Cold Laminator 1630mm 64"

Upgraded with new appearance

Video demo: <https://youtu.be/VVXwHjA4qdM>



Features:

Low labor cost, improve quality to save at least a manpower.

Max 80 °C heat assistance, can completely avoid the bubbles and snow-state mass while laminating.

No tilt for whole 50 meters laminating.

*Can achieve **500** square/hour working!*


No wrinkle for thin medias laminating.

*Self peeling back paper and auto take up
with 3 Japanese Alloy-steel blades for slitting.*

With foot-pedal, easy operation

Details:

New-designed neat control panel,easy operation

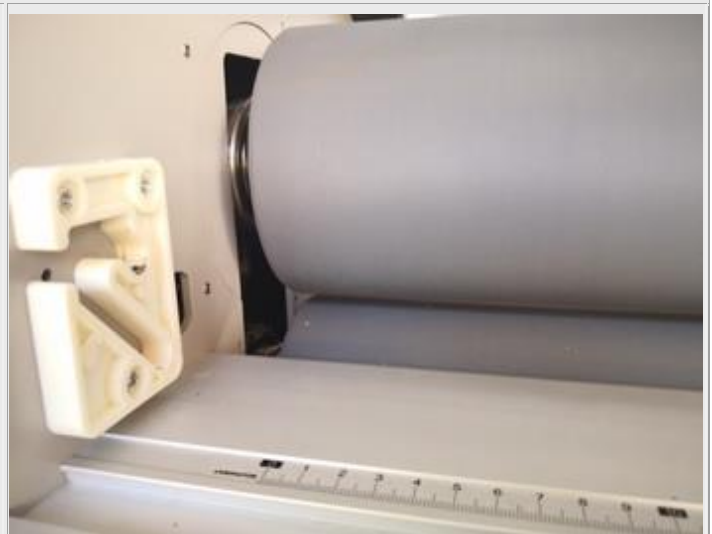

Dia 120mm high quality Silicon rollers anti-stick




Anti-tilt tension adjustable system



140W speed adjustable force moment motor




Standard slitting function with 3 Alloy-steel blades

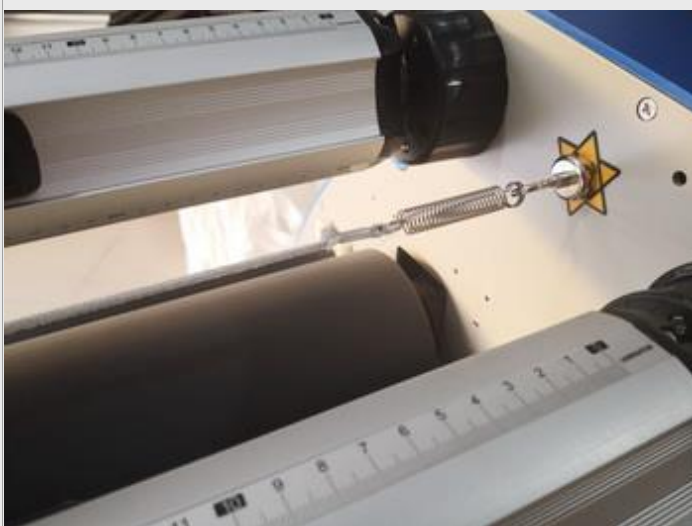


With anti-static rope to eliminate static while peeling

Parameters

Model	F5-1700
Application	Laminating for indoor/outdoor printings
Maximum Working width	1630mm 64"
Rollers Dia	120mm
Roller lifting mode	Single side linkage lifting
Max laminating temperature	80°C (safe range max 60°C)
Heating mode	Infrared inner heating
Laminating mode	Single side
Laminating speed	12m/min MAX
Roller lifting height	28mm,0.9"
Roller pre-heating time	5-10min
Power supply	AC220±10% 50HZ, Optional 110v, 60HZ
Heating Power	1400W
Power consumption	0.8-1KW/hour
Net weight	180KG
Size	1860×680×1140(mm)
Pedal	With

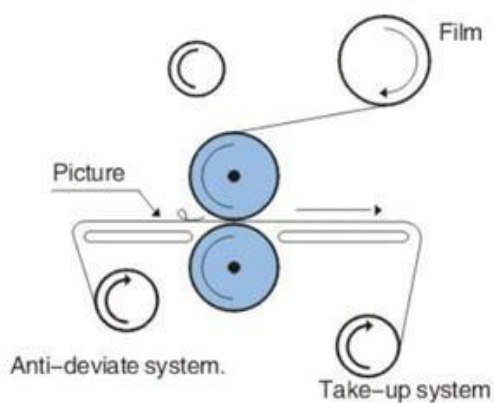

Hot Laminating

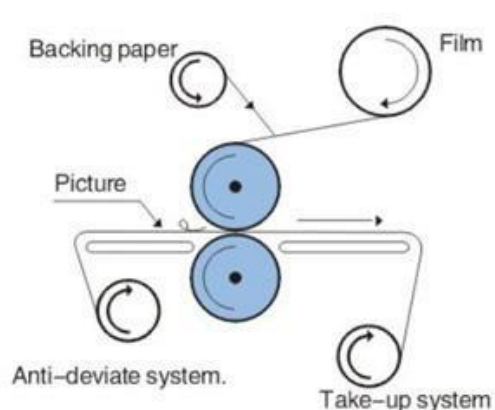

Cold Laminating

